


KEY EPOCOAT CHIP FLOORING

Technical Data Sheet

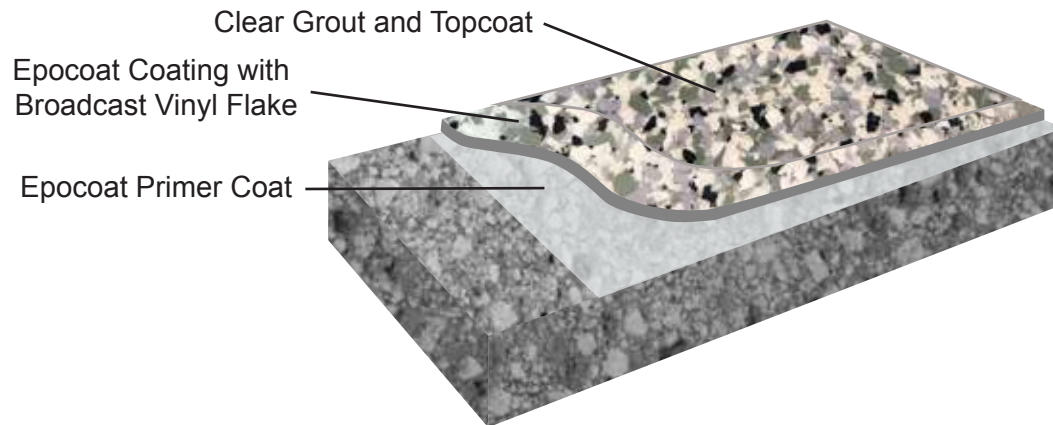

DESCRIPTION

KEY EPOCOAT CHIP FLOORING is a 35-45 mil moisture tolerant decorative resin floor system which contains a unique water-based epoxy technology allowing for installation on concrete substrates emitting excessive moisture vapor. **KEY EPOCOAT CHIP** is sealed with various clear resin topcoats such as **KEY EPOGLAZE**, **KEY #445**, or **KEY #446** depending on project requirements. **KEY EPOCOAT CHIP** is ideal for any project with a requirement for USGBC LEED certification. Typical uses include corridors, lobbies, light manufacturing areas, classrooms, cafeterias, general purpose use, and numerous other areas.

KEY ADVANTAGES

- Meets USGBC LEED criteria for low VOC
- Low odor—can be installed in occupied facilities
- Decorative appearance
- High moisture vapor tolerance
- Safe (slip resistant finish with optional anti-slip grit)
- Sanitary, low maintenance
- Easy to install
- Minimal downtime

TYPICAL USES

- Corridors and lobbies
- Light manufacturing
- Classrooms and cafeterias
- General purpose areas
- Numerous other uses—consult with **Key Resin**

PHYSICAL PROPERTIES

Test Name	Method	Value
Color		Key Standard Blended Colors and Custom Blended Colors
VOC (Volatile Organic Content)	EPA Method 24	Refer to Individual Product Component Data Sheet
Adhesion to Concrete	ASTM D7234	300-400+ psi (Concrete Failure, varies by concrete strength)
Compressive Strength	ASTM C579	5,500 psi
Flexural Strength	ASTM C580	2,100 psi
Hardness, Shore D	ASTM D2240	70-75
Cure Time		Varies with Topcoat
Flammability	ASTM D635	Self Extinguishing
Abrasion Resistance	ASTM D4060, CS17 Wheel, 1000 cycles	Varies with Topcoat
Impact Resistance	MIL-D-3134J	Withstands 16 ft-lbs without cracking, delamination or chipping
Resistance to Elevated Temperatures	MIL-D-3134J	No slip or flow at required temperature of 158°F
Slip Resistance	ASTM D2047	>0.6 Passes ADA recommendations

KEY EPOCOAT CHIP FLOORING

Technical Data Sheet



APPLICATION

Concrete surfaces must be in sound condition and properly prepared prior to any **Key Resin Company** flooring system installation. Refer to **Key Resin Technical Bulletin #1** for specific preparation guidelines and required moisture testing. For specific installation details consult **Key Resin's Installation Instructions Guideline**.

MAINTENANCE

After completing the application of **KEY EPOCOAT CHIP FLOORING**, the installer should provide the owner with maintenance instructions. If floors become slippery due to animal fats, oil, grease, or soap film, clean and rinse thoroughly. **KEY EPOCOAT CHIP FLOORING** is easily cleaned with neutral soaps or detergents. Routine mechanical scrubbing using the appropriate pad is recommended for all surfaces having a slip resistant texture. Waxing is optional. Long periods of heavy traffic may cause wear patterns necessitating a maintenance application of a finish coat. Refer to **Key Resin Technical Bulletins #3 and #3-A** for additional recommendations.

SYSTEM OPTIONS

- Various breathable topcoats
- Varied degrees of slip resistance

TECHNICAL SERVICE

Key Resin Company provides services and consultations on material selection, specification, troubleshooting, and other information on the proper repair and protection of concrete surfaces. **Key Resin Representatives** are available to assist. Telephone **888.943.4532** or visit **www.keyresin.com**.

AVAILABILITY

Key Resin flooring systems are available throughout the United States, Canada, and a number of other countries. Contact the **Key Resin Sales Representative** in your area for details.

WARRANTY

Key Resin Company ("Key") warrants for a period of one (1) year that its products will be free of manufacturing defects and will be in conformity with published specifications when handled, stored, mixed, and applied in accordance with recommendations of Key. If any product fails to meet this warranty, the liability of Key will be limited to replacement of any non-conforming material if notice of such non-conformity is given to Key within (1) one year of delivery of materials. Key may in its discretion refund the price received by Key in lieu of replacing the material. No customer, distributor, or representative of Key is authorized to change or modify the published specifications of this warranty in any way. No one is authorized to make oral warranties on behalf of Key. In order to obtain replacement or refund the customer must provide written notice containing full details of the non-conformity. Key reserves the right to inspect the non-conforming material prior to replacement. EXCEPT FOR THE EXPRESSED WARRANTY STATED ABOVE, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PURPOSE. KEY'S OBLIGATION SHALL NOT EXTEND BEYOND THE OBLIGATIONS EXPRESSLY UNDERTAKEN ABOVE AND KEY SHALL HAVE NO LIABILITY OR RESPONSIBILITY TO THE PURCHASER OR ANY THIRD PARTY FOR ANY LOSS, COST, EXPENSE, DAMAGE OR LIABILITY, WHETHER DIRECT OR INDIRECT, OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



CORPORATE OFFICE / EASTERN US / INTERNATIONAL
4050 Clough Woods Drive . Batavia, OH 45103
513.943.4225 888.943.4532 www.keyresin.com



Rev 1/1/2017

WESTERN US
1315 E. Gibson, Suite D . Phoenix, AZ 85034
602.523.9353