


# KEY LUSTER METALLIC

Technical Data Sheet

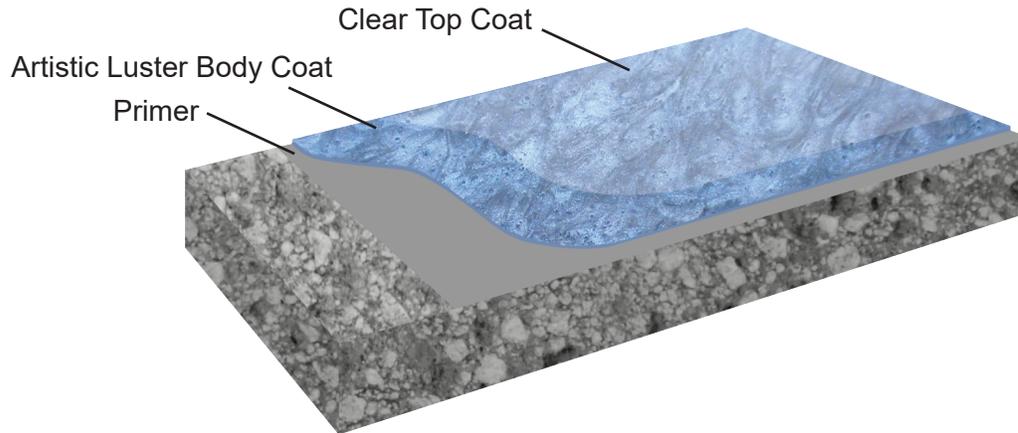

## DESCRIPTION

**KEY LUSTER METALLIC** is a highly decorative, high-build resin coating system having a bright metallic finish. It is installed using a variety of techniques that result in unique, one-of-a-kind artistic floors. **KEY LUSTER METALLIC** flooring systems are typically finished with a clear urethane, polyaspartic, or epoxy sealer for excellent wear and abrasion resistance. **KEY LUSTER METALLIC** is ideal for residential use, office complexes, commercial/retail areas, lobbies, or light industrial applications.

## KEY ADVANTAGES

- Unique, signature flooring designs
- Excellent clarity and color
- UV resistant clear sealer
- Multiple effects and colors possible
- Low odor during application and cure
- Meets USGBC LEED criteria for low VOC
- Easy to maintain
- Easy spreading and wetting properties

## TYPICAL USES

- Residential
- Offices
- Hospitality
- Schools
- Retail and commercial areas
- Lobbies and corridors
- Light industrial
- Numerous other uses—consult with **Key Resin**

## PHYSICAL PROPERTIES

Test Name	Method	Value
Color		44 Colors Refer to Luster Metallic Color Card
VOC (Volatile Organic Content)	EPA Method 24	Refer to Individual Product Component Data Sheet
Adhesion to Concrete	ASTM D7234	300-400+ psi (Concrete Failure, varies by concrete strength)
Compressive Strength	ASTM C579	11,000 psi
Flexural Strength	ASTM C580	8,000 psi
Hardness, Shore D	ASTM D2240	80-85
Tensile Strength	ASTM D412	8,500 psi
Flammability	ASTM D635	Self Extinguishing
Abrasion Resistance	ASTM D4060, CS17 Wheel, 1000 cycles	32 mg average Varies by topcoat
Slip Resistance	ASTM D2047	>0.6 Passes ADA recommendations

# KEY LUSTER METALLIC

Technical Data Sheet



## APPLICATION

### SURFACE PREPARATION

Surface Preparation is the most critical portion of any successful resinous flooring system application. All substrates must be properly prepared and tested for moisture as outlined in **Key Resin Technical Bulletin #1**. If moisture testing confirms excessive levels of moisture, apply moisture mitigation system recommended by **Key Resin**. Work must be performed by experienced contractors. The **Key Resin Technical Service Department** is available to answer any questions.

### INSTALLATION

**KEY LUSTER METALLIC** material components are mixed on site. Refer to the detailed installation instructions document and **Key Resin Technical Service**.

### CLEAN UP

Clean skin with soap and water. Tools and equipment should be cleaned with xylene or lacquer thinner. Consult Safety Data Sheet (SDS) for safety and health precautions.

## MAINTENANCE

After completing the application of **KEY LUSTER METALLIC**, the installer should provide the owner with maintenance instructions. **KEY LUSTER METALLIC** is easily cleaned with neutral soaps or detergents. Routine mechanical scrubbing using the appropriate pad is recommended for all surfaces having a slip resistant texture. Refer to **Key Resin Technical Bulletins #3 and #3-A** for additional recommendations. Note: Office chairs should use a floor mat for additional protection of the floor finish.

## SYSTEM OPTIONS

- Various degrees of pigment loading
- Fast cure formulations
- UV light resistance formulations
- Cold cure formulations
- Urethane, polyaspartic finishes
- Chemical resistant finishes
- Moisture tolerant base coats

## TECHNICAL SERVICE

**Key Resin Company** provides services and consultations on material selection, specification, troubleshooting, and other information on the proper repair and protection of concrete surfaces. **Key Resin Sales/Technical Representatives** are available to assist. Telephone 888.943.4532 or visit [www.keyresin.com](http://www.keyresin.com).

## AVAILABILITY

**Key Resin** materials are available throughout the United States, Canada, China, and a number of other countries. Contact the **Key Resin Representative** in your area for details.

## WARRANTY

**Key Resin Company** ("Key") warrants for a period of one (1) year that its products will be free of manufacturing defects and will be in conformity with published specifications when handled, stored, mixed, and applied in accordance with recommendations of Key. If any product fails to meet this warranty, the liability of Key will be limited to replacement of any non-conforming material if notice of such non-conformity is given to Key within (1) one year of delivery of materials. Key may in its discretion refund the price received by Key in lieu of replacing the material. No customer, distributor, or representative of Key is authorized to change or modify the published specifications of this warranty in any way. No one is authorized to make oral warranties on behalf of Key. In order to obtain replacement or refund the customer must provide written notice containing full details of the non-conformity. Key reserves the right to inspect the non-conforming material prior to replacement. EXCEPT FOR THE EXPRESSED WARRANTY STATED ABOVE, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PURPOSE. KEY'S OBLIGATION SHALL NOT EXTEND BEYOND THE OBLIGATIONS EXPRESSLY UNDERTAKEN ABOVE AND KEY SHALL HAVE NO LIABILITY OR RESPONSIBILITY TO THE PURCHASER OR ANY THIRD PARTY FOR ANY LOSS, COST, EXPENSE, DAMAGE OR LIABILITY, WHETHER DIRECT OR INDIRECT, OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



Rev 6/26/2020 v1.0

**CORPORATE OFFICE / EASTERN US / INTERNATIONAL**  
4050 Clough Woods Drive . Batavia, OH 45103  
513.943.4225 888.943.4532 [www.keyresin.com](http://www.keyresin.com)

**WESTERN US**  
4330 N. 43rd Avenue, Suite B4, Phoenix, AZ 85031  
602.523.9353