


KEY MORTAR SL CHIP 100 FLOORING

Technical Data Sheet

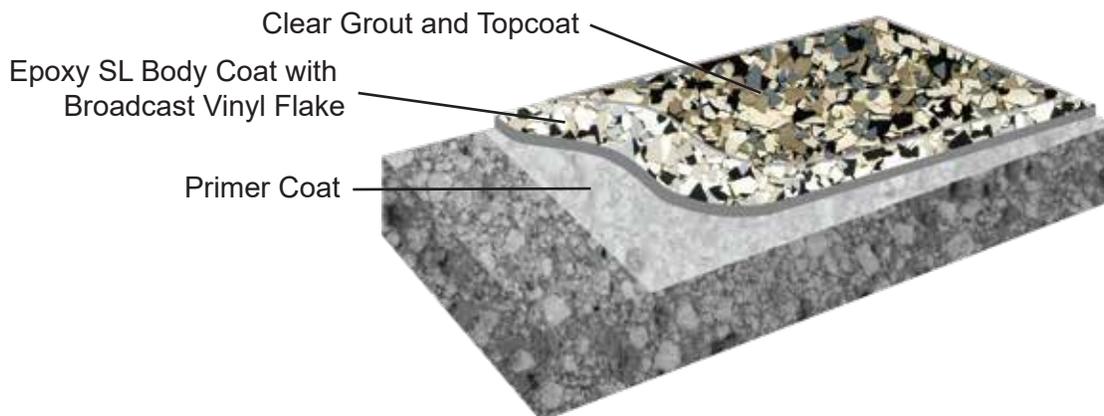

DESCRIPTION

KEY MORTAR SL CHIP 100 FLOORING is a 1/8" decorative resin floor system consisting of self-leveling epoxy slurry, decorative colored vinyl chip (flake) broadcast and clear polymer resin topcoats. The installed system reduces porosity and produces a dense, sanitary finish that minimizes bacterial growth and chemical penetration. The finish can be made slip resistant as required for wet areas. Typical uses include corridors, lobbies, light to medium duty manufacturing areas, classrooms, cafeterias, medical facilities, pharmaceutical process areas, general purpose use, and numerous other areas.

KEY ADVANTAGES

- Excellent wear and abrasion resistance
- Low maintenance finish
- Meets USGBC LEED criteria for low VOC
- Low odor—can be installed in occupied facilities
- Decorative appearance
- Safe (slip resistant finish with optional anti-slip grit)
- Sanitary, seamless, does not support mold growth
- Minimal downtime
- Chemical resistant finishes are available
- Meets USDA requirements
- Available with Bioclean antimicrobial additive if needed

TYPICAL USES

- Corridors and lobbies
- Light to medium duty manufacturing
- Classrooms and cafeterias
- Retail areas and showrooms
- Medical facilities and pharmaceutical process areas
- Toilet and locker rooms
- General purpose areas
- Restaurant dining areas
- Numerous other uses—consult with **Key Resin**

PHYSICAL PROPERTIES

Test Name	Method	Value
Color		Key Standard Blended Colors and Custom Blended Colors
VOC (Volatile Organic Content)	EPA Method 24	Refer to Individual Product Component Data Sheet
Adhesion to Concrete	ASTM D7234	300-400+ psi (Concrete Failure, varies by concrete strength)
Compressive Strength	ASTM C579	11,500 psi
Flexural Strength	ASTM C580	4,300 psi
Hardness, Shore D	ASTM D2240	80-90
Cure Time		Refer to Individual Product Component Data Sheet
Flammability	ASTM D635	Self Extinguishing
Abrasion Resistance	ASTM D4060, CS17 Wheel, 1000 cycles	32 mg average Varies by topcoat
Impact Resistance	MIL-D-3134J	Withstands 16 ft-lbs without cracking, delamination or chipping
Resistance to Elevated Temperatures	MIL-D-3134J	No slip or flow at required temperature of 158°F
Slip Resistance	ASTM D2047	>0.6 Passes ADA recommendations

KEY MORTAR SL CHIP 100 FLOORING

Technical Data Sheet



APPLICATION

SURFACE PREPARATION

Surface Preparation is the most critical portion of any successful resinous flooring system application. All substrates must be properly prepared and tested for moisture as outlined in **Key Resin Technical Bulletin #1**. Work must be performed by experienced contractors. The **Key Resin Technical Service Department** is available to answer any questions.

INSTALLATION

KEY MORTAR SL CHIP 100 material components are mixed on site. Refer to the detailed installation instructions document and **Key Resin Technical Service**.

CLEAN UP

Clean skin with soap and water. Tools and equipment should be cleaned with xylene or lacquer thinner. Consult Safety Data Sheet (SDS) for safety and health precautions.

MAINTENANCE

After completing the application of **KEY MORTAR SL CHIP 100 FLOORING**, the installer should provide the owner with maintenance instructions. **KEY MORTAR SL CHIP 100** is easily cleaned with neutral soaps or detergents. Routine mechanical scrubbing using the appropriate pad is recommended for all surfaces having a slip resistant texture. Refer to **Key Resin Technical Bulletins #3** and **#3-A** for additional recommendations. Note: Office chairs should use a floor mat for additional protection of the floor finish.

WARRANTY

Key Resin Company ("Key") warrants for a period of one (1) year that its products will be free of manufacturing defects and will be in conformity with published specifications when handled, stored, mixed, and applied in accordance with recommendations of Key. If any product fails to meet this warranty, the liability of Key will be limited to replacement of any non-conforming material if notice of such non-conformity is given to Key within (1) one year of delivery of materials. Key may in its discretion refund the price received by Key in lieu of replacing the material. No customer, distributor, or representative of Key is authorized to change or modify the published specifications of this warranty in any way. No one is authorized to make oral warranties on behalf of Key. In order to obtain replacement or refund the customer must provide written notice containing full details of the non-conformity. Key reserves the right to inspect the non-conforming material prior to replacement. EXCEPT FOR THE EXPRESSED WARRANTY STATED ABOVE, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PURPOSE. KEY'S OBLIGATION SHALL NOT EXTEND BEYOND THE OBLIGATIONS EXPRESSLY UNDERTAKEN ABOVE AND KEY SHALL HAVE NO LIABILITY OR RESPONSIBILITY TO THE PURCHASER OR ANY THIRD PARTY FOR ANY LOSS, COST, EXPENSE, DAMAGE OR LIABILITY, WHETHER DIRECT OR INDIRECT, OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

SYSTEM OPTIONS

- Fast cure sealer formulations
- UV light resistance formulations
- Urethane, polyaspartic finishes
- Chemical resistant finishes
- Moisture mitigation systems available

TECHNICAL SERVICE

Key Resin Company provides services and consultations on material selection, specification, troubleshooting, and other information on the proper repair and protection of concrete surfaces. **Key Resin Representatives** are available to assist. Telephone **888.943.4532** or visit **www.keyresin.com**.

AVAILABILITY

Key Resin flooring systems are available throughout the United States and a number of other countries. Contact the **Key Resin Representative** in your area for details.



CORPORATE OFFICE / EASTERN US / INTERNATIONAL

4050 Clough Woods Drive . Batavia, OH 45103
513.943.4225 888.943.4532 www.keyresin.com

Rev 6/10/2022

WESTERN US

4330 N. 43rd Street . Phoenix, AZ 85031
602.523.9353