


KEY EPOXY TERRAZZO

Technical Data Sheet

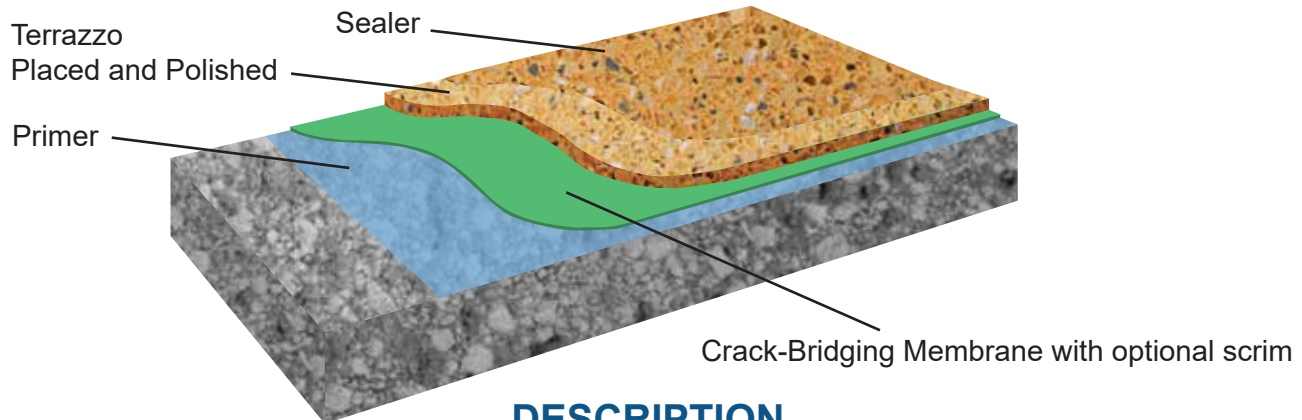

DESCRIPTION

KEY EPOXY TERRAZZO is a highly decorative flooring system that combines pigmented 100% solids epoxy resin with marble, colored glass, granite, or other approved aggregates and is trowel applied at 1/4" to 3/8" nominal thickness and ground and polished to expose a beautiful matrix of epoxy and aggregates. For Venetian applications, thickness may range from 5/8" to 3/4". **KEY EPOXY TERRAZZO** provides outstanding durability and wear resistance resulting in the lowest life cycle cost of any flooring system available. **KEY EPOXY TERRAZZO** is available in several formulations including conductive, enhanced UV light resistance, & highly chemical resistant epoxy novolac formulations. Crack and movement bridging installations of **KEY EPOXY TERRAZZO** can be provided when installed in conjunction with a **KEY #580 Waterproofing & Crack Isolation Membrane**.

KEY ADVANTAGES

- Extensive colors for unlimited design variations
- Colors will not fade or wear thin with interior service
- Chemical and stain resistant, low maintenance
- High wear, impact and abrasion resistance
- Rapid cure, very low odor during installation in occupied areas
- Less weight than marble, granite and cement terrazzo, more suitable for multi-story buildings
- Seamless, sanitary, resists bacteria and fungal growth
- Lowest life-cycle cost decorative flooring available
- Meets USGBC LEED V4.1 criteria for IEQ 4.2 for low VOC, IEQ 4.3 for low indoor air emissions (CDPH - CA section 01350 Test Method)
- Meets NTMA and TTMAC standards for epoxy terrazzo
- Key Resin Company is a member of the NTMA and TTMAC
- Key Resin Company is a member of Sustainable Minds Transparency Catalog
- Key Resin Company is a member of CHPS-Collaborative for High Performance Schools

TYPICAL USES

- Office complexes
- Commercial applications
- Lobbies and corridors
- Arenas/Stadiums/Coliseums
- Airports
- Government facilities
- Libraries
- Schools and universities
- Hospitals and other healthcare facilities
- Residential
- Numerous other uses—consult with Key Resin

PHYSICAL PROPERTIES

Test Name	Method	Value
Adhesion to Concrete	ASTM D7234	300-400+ psi (Concrete Failure, varies by concrete strength)
Compressive Strength	ASTM C579	10,000 psi
Flexural Strength	ASTM C580	3,500 psi
Tensile Strength	ASTM C307	2,500 - 2,600 psi
Thermal Shock Resistance	ASTM C884	Passes
Thermal Coefficient of Linear Expansion	ASTM C531 ASTM D696	25 x 10 ⁶ inches per inch per degree °F to 140 °F max
Resistance to Elevated Temperatures	MIL-D-3134F §4.7.4	No slip or flow at required temperature of 158°F
Indentation	MIL-D-3134F §4.7.4	Withstands 2,000 lbs-in ² for 30 mins with no indentation
Impact Resistance	MIL-D-3134F §4.7.4	Withstands 16 ft-lbs without cracking, delamination or chipping
Abrasion Resistance	ASTM D4060, CS17 Wheel, 1000 cycles	35 mg
Critical Radiant Flux	ASTM D648	1.0
Electrical Conductivity		Non-Conductive (Conductive Available)
Flammability	ASTM D635	Self Extinguishing over concrete
Fungus and Bacterial Growth	MIL-F-52505 §4.4.2.11	Will not support growth of fungus or bacteria
Water Absorption	ASTM D570	0.010%
Slip Resistance	ANSI 131.1	>0.42 Passes ANSI

KEY EPOXY TERRAZZO

Technical Data Sheet



APPLICATION

SURFACE PREPARATION

Surface Preparation is the most critical portion of any successful resinous flooring system application. All substrates must be properly prepared and tested for moisture as outlined in **Key Resin Technical Bulletin #1**. Work must be performed by experienced contractors. The **Key Resin Technical Service Department** is available to answer any questions.

INSTALLATION

KEY EPOXY TERRAZZO material components are mixed on site. Refer to the detailed installation instructions document and **Key Resin Technical Service**.

CLEAN UP

Clean skin with soap and water. Tools and equipment should be cleaned with xylene or lacquer thinner. Consult Safety Data Sheet (SDS) for safety and health precautions.

MAINTENANCE

After completing the application of **KEY EPOXY TERRAZZO FLOORING**, the installer should provide the owner with maintenance instructions. **KEY EPOXY TERRAZZO** is easily cleaned with neutral soaps or detergents. Routine mechanical scrubbing using the appropriate pad is recommended for all surfaces having a slip resistant texture. Refer to **Key Resin Technical Bulletins #3** and **#3-A** and the NTMA maintenance guidelines for additional recommendations. Note: Office chairs should use a floor mat for additional protection of the floor finish.

SYSTEM OPTIONS

- Fast cure sealer formulations
- Urethane, polyaspartic finishes
- Chemical resistant finishes
- Enhanced UV Resistant formulation
- Conductive formulation
- Chemical resistant novolac formulation

TECHNICAL SERVICE

Key Resin Company provides services and consultations on material selection, specification, troubleshooting, and other information on the proper repair and protection of concrete surfaces. **Key Resin Representatives** are available to assist. Telephone **888.943.4532** or visit **www.keyresin.com**.

AVAILABILITY

Key Resin flooring systems are available throughout the United States and a number of other countries. Contact the **Key Resin Representative** in your area for details.

WARRANTY

Key Resin Company ("Key") warrants for a period of one (1) year that its products will be free of manufacturing defects and will be in conformity with published specifications when handled, stored, mixed, and applied in accordance with recommendations of Key. If any product fails to meet this warranty, the liability of Key will be limited to replacement of any non-conforming material if notice of such non-conformity is given to Key within (1) one year of delivery of materials. Key may in its discretion refund the price received by Key in lieu of replacing the material. No customer, distributor, or representative of Key is authorized to change or modify the published specifications of this warranty in any way. No one is authorized to make oral warranties on behalf of Key. In order to obtain replacement or refund the customer must provide written notice containing full details of the non-conformity. Key reserves the right to inspect the non-conforming material prior to replacement. EXCEPT FOR THE EXPRESSED WARRANTY STATED ABOVE, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PURPOSE. KEY'S OBLIGATION SHALL NOT EXTEND BEYOND THE OBLIGATIONS EXPRESSLY UNDERTAKEN ABOVE AND KEY SHALL HAVE NO LIABILITY OR RESPONSIBILITY TO THE PURCHASER OR ANY THIRD PARTY FOR ANY LOSS, COST, EXPENSE, DAMAGE OR LIABILITY, WHETHER DIRECT OR INDIRECT, OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Rev 12/11/2023 v1.4

CORPORATE OFFICE / EASTERN US / INTERNATIONAL

4050 Clough Woods Drive . Batavia, OH 45103
513.943.4225 888.943.4532 www.keyresin.com

WESTERN US

4330 N. 43rd Avenue, Suite B4, Phoenix, AZ 85031
602.523.9353