


KEY URECON CHIP 100

Technical Data Sheet

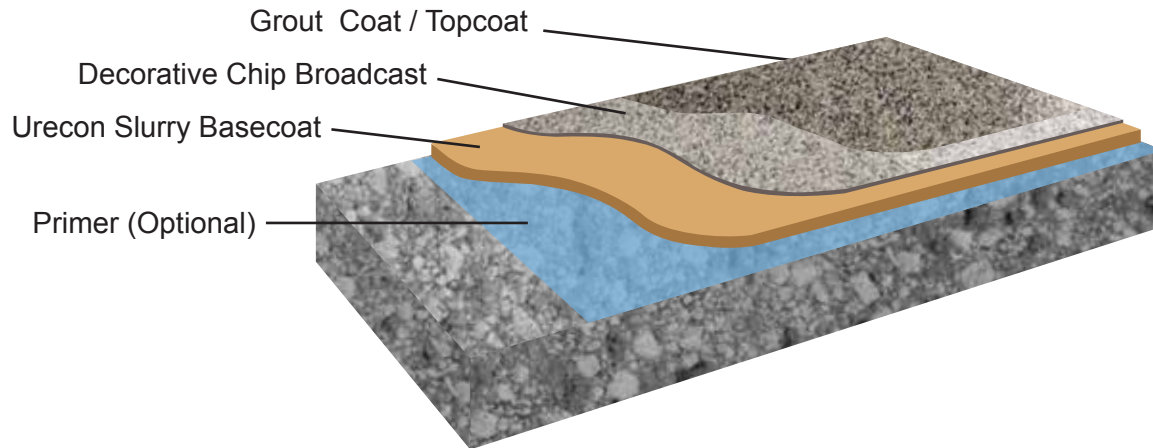

DESCRIPTION

KEY URECON CHIP 100 is a 3/16"-1/4" moisture vapor tolerant polymer flooring system consisting of Key Urecon SL or Key Urecon 16, a urethane/cementitious slurry and a colored decorative chip broadcast finish. **KEY URECON CHIP 100** is finished with various options of clear satin or gloss topcoats to meet project requirements. The installed system reduces porosity and produces a dense, slip resistant sanitary finish that minimizes bacterial growth and chemical penetration. The decorative chips are available in a series of pre-blended or solid colors. An integral cove base can be installed in areas requiring seamless wall to floor transitions. For chemical resistant applications and kitchens, specify **KEY URECON CHIP-HP**.

KEY ADVANTAGES

- Decorative appearance
- Seamless, sanitary floor
- Will not lose bond due to excess moisture in the slab
- Thermal shock resistant
- High impact and wear resistance
- Low maintenance
- Meets USGBC LEED criteria for low VOC
- Safe (slip resistant finish) with optional non-skid additive
- Chemical resistant finishes are available
- Meets USDA requirements
- Available with Bioclean antimicrobial additive if needed

TYPICAL USES

- Corridors
- Restrooms/locker rooms
- Kitchens
- Cafeterias
- Laboratories
- Manufacturing/processing areas
- Pharmaceutical manufacturing areas
- Bottling/packaging areas
- Numerous other uses—Consult with **Key Resin**

PHYSICAL PROPERTIES

Test Name	Method	Value
Color		Key Standard Color Blends and Custom Blend Colors
VOC (Volatile Organic Content)	EPA Method 24	Refer to Individual Product Component Data Sheet
Adhesion to Concrete	ASTM D7234	300-400+ psi (Concrete Failure, varies by concrete strength)
Compressive Strength	ASTM C579	7,700 psi
Flexural Strength	ASTM C580	2,600 psi
Hardness, Shore D	ASTM D2240	80-85
Tensile Strength	ASTM C307	1,100 psi
Flammability	ASTM D635	Self Extinguishing
Abrasion Resistance	ASTM D4060, CS17 Wheel, 1000 cycles	32 mg average Varies by topcoat
Impact Resistance	MIL-D-3134J	Withstands 16 ft-lbs without cracking, delamination or chipping
Resistance to Elevated Temperatures	MIL-D-3134J	No slip or flow at required temperature of 158°F
Slip Resistance	ASTM D2047	>0.6 Passes ADA recommendations

KEY URECON CHIP 100

Technical Data Sheet



APPLICATION

SURFACE PREPARATION

Surface Preparation is the most critical portion of any successful resinous flooring system application. All substrates must be properly prepared and tested for moisture as outlined in **Key Resin Technical Bulletin #1**. If moisture testing confirms excessive levels of moisture, apply moisture mitigation system recommended by **Key Resin**. Work must be performed by experienced contractors. The **Key Resin Technical Service Department** is available to answer any questions.

INSTALLATION

KEY URECON CHIP 100 material components are mixed on site. Refer to the detailed installation instructions document and **Key Resin Technical Service**.

CLEAN UP

Clean skin with soap and water. Tools and equipment should be cleaned with xylene or lacquer thinner. Consult Safety Data Sheet (SDS) for safety and health precautions.

MAINTENANCE

After completing the application of **KEY URECON CHIP 100**, the installer should provide the owner with maintenance instructions. **KEY URECON CHIP 100** is easily cleaned with neutral soaps or detergents. Routine mechanical scrubbing using the appropriate pad is recommended for all surfaces having a slip resistant texture. Refer to **Key Resin Technical Bulletins #3 and #3-A** for additional recommendations.

WARRANTY

Key Resin Company ("Key") warrants for a period of one (1) year that its products will be free of manufacturing defects and will be in conformity with published specifications when handled, stored, mixed, and applied in accordance with recommendations of Key. If any product fails to meet this warranty, the liability of Key will be limited to replacement of any non-conforming material if notice of such non-conformity is given to Key within (1) one year of delivery of materials. Key may in its discretion refund the price received by Key in lieu of replacing the material. No customer, distributor, or representative of Key is authorized to change or modify the published specifications of this warranty in any way. No one is authorized to make oral warranties on behalf of Key. In order to obtain replacement or refund the customer must provide written notice containing full details of the non-conformity. Key reserves the right to inspect the non-conforming material prior to replacement. EXCEPT FOR THE EXPRESSED WARRANTY STATED ABOVE, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PURPOSE. KEY'S OBLIGATION SHALL NOT EXTEND BEYOND THE OBLIGATIONS EXPRESSLY UNDERTAKEN ABOVE AND KEY SHALL HAVE NO LIABILITY OR RESPONSIBILITY TO THE PURCHASER OR ANY THIRD PARTY FOR ANY LOSS, COST, EXPENSE, DAMAGE OR LIABILITY, WHETHER DIRECT OR INDIRECT, OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

SYSTEM OPTIONS

- Fast cure formulations
- UV light resistance formulations
- Urethane, polyaspartic, epoxy, MMA finishes
- Chemical resistant finishes

TECHNICAL SERVICE

Key Resin Company provides services and consultations on material selection, specification, troubleshooting, and other information on the proper repair and protection of concrete surfaces. **Key Resin Sales/Technical Representatives** are available to assist. Telephone 888.943.4532 or visit www.keyresin.com.

AVAILABILITY

Key Resin materials are available throughout the United States, Canada, China, and a number of other countries. Contact the **Key Resin Representative** in your area for details.

